



Communications without Frontiers



TM840-GW

DMR/Analog/PTToC

TM840 series gateway supports voice interconnection between DMR and PTToC radios. It can be widely used in different zones, formats and frequency bands with rich compatibility and high convenience.



Highlights

Interconnection Between Private Network and Public Network

TM840-GW gateway supports voice interconnection between DMR and PTToc Radio.

Multiple Network Access

2G/3G/4G/Wi-Fi network ensures wide coverage and stable connectivity.

Multiple Private Communications Formats

TM840-GW gateway supports voice interconnection between analog and DMR Tier II.

Interconnection Between VHF and UHF

TM840-GW gateway supports voice interconnection between different frequencies in VHF(136-174MHz) and UHF(400-470MHz).

High Transmitting Power

10 Watt power ratings allows wider coverage.

Specification

General Specifications


Dimensions	176x59x183mm
Weight	≤1380g
Operating Temperature	-20°C + 55°C
Storage Temperature	-40°C + 85°C

PTToC Specifications

Communications Mode & Frequency Band	America
	GSM:Band2/8
	WCDMA:Band1/2/4/5/8 FDD-LTE:Band2/4/5/7/12/13/17/25/26
RAM+ROM	512MB+4GB
Wi-Fi	2.4GHz

DMR/Analog Specifications

Frequency Available	136-174MHz/400-470Hz
Format	Analog/DMR
Operation Mode	Direct Mode/Repeater
Transmitting Power	1-10W
Sensitivity	-120dBm

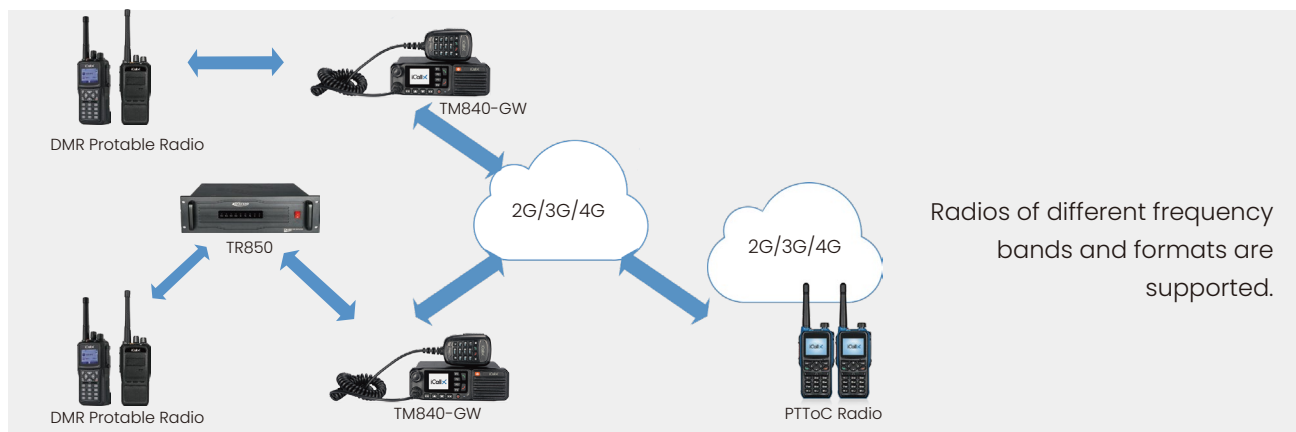

Accessories

Power Cable(BU)	Power Cable(UK)	Power Cable(US)	Wi-Fi & Bluetooth Antenna	Lte Antenna	Programming Cable	Micro USB Data Cable	Hand Microphone	Switching Power Supply

iCallX

Address

6073 NW 167 St., Unit C 27
Miami, FL 33015
USA

Contact

Email: info@icallx.com
Phone: +1 786 359 4933

